

## DUALIE® 3AA / DUALIE® 3AA LASER

### DUAL FUNCTION INTRINSICALLY SAFE AA BATTERY FLASHLIGHT

**MARKET**
**APPLICATIONS:**

Industrial, Occupational Safety, Law Enforcement, Fire & Rescue, Hardware/tool, Sporting Goods, Consumer

**DESCRIPTION:**

The Dualie® 3AA is an intrinsically safe, high performance, 3 AA battery powered dual function LED flashlight. The Dualie® 3AA model features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety. The Dualie® 3AA Laser model features forward facing LED spot beam and laser pointer that can be used individually or at the same time for location identification. Both models have opposing switches for easy user activation of desired function(s). Body features a superior grip texture to provide a comfortable but slip resistant feel and is constructed of an engineered polymer resin that is virtually indestructible, shock resistant, non-conductive and light weight. Integrated, non-protruding spring loaded belt clip contained within body outline. All models available with optional belt clip with two integrated magnets.

**CASE MATERIAL:**

Impact and chemical resistant Engineered Polymer resin; gasket sealed and vented. Class I, Division 1 models available in high visibility yellow or black. ATEX/IEC models with antistatic body and integrated & retained facecap lock available in international safety orange and high visibility yellow.

**DIMENSIONS:**

Length: 7.00 in. (17.78 cm)                      Length w/Magnetic clip: 7.50 in. (19.05 cm)  
 Body thickness: 1.06 in. (2.69 cm)            Body Width: 1.52 in. (3.86 cm)            Face cap diameter: 1.86 in. (4.72 cm)

**WEIGHT:**

Standard clip: 6.8 oz. (193 grams) with AA alkaline batteries, 5.9 oz. (167 grams) with AA lithium batteries\*.  
 Magnetic clip: 7.1 oz. (201 grams) with AA alkaline batteries, 6.2 oz. (176 grams) with AA lithium batteries\*.

**LENS:**

Unbreakable polycarbonate facecap and side lens with scratch resistant coating.

**LIGHT SOURCE:**

**Dualie® 3AA:** Two (2) White C4® LEDs, impervious to shock with a 50,000 hour lifetime.  
**Dualie® 3AA Laser:** One (1) White C4® LED, impervious to shock with a 50,000 hour lifetime.  
 One (1) red laser, 640nm - 650nm, shock proof mounting.

**LIGHT OUTPUT:**

**Dualie® 3AA:** Spot - 140 lumens, 7,300 candela peak beam intensity and 171 meter beam distance.  
 Flood - 140 lumens, 80 candela peak beam intensity and 18 meter beam distance.  
 Spot and Flood combined - 245 lumens.

**Dualie® 3AA Laser:** LED - 150 lumens, 7,700 candela peak beam intensity and 175 meter beam distance.  
 Laser - Red, <5mW output power; Class 3R laser.

**ON/OFF:**

Opposing head switches for easy identification. Spot LED push button head switch provides one handed momentary or constant operation. Flood LED or Laser push button head switch provides on/off operation.

**RUN TIME:**

**Dualie® 3AA:** Spot - 18 hours to 10% of initial lumen output. See performance curve.  
 Flood - 18 hours to 10% or initial lumen output. Both - 9 hours to 10% initial lumen output.  
**Dualie® 3AA Laser:** LED - 17 hours to 10% of initial lumen output. See performance curve.  
 Laser - 70 hours to 10% of initial output. Both - 12 hours to 10% initial lumen/laser output.

**BATTERY:**

Three (3) "AA" size alkaline or lithium primary batteries. Mechanical battery polarity protection.

**FEATURES:**


Dual function with opposing switches for easy function identification.  
 2 meter impact resistance tested.

IP67 rated; dust-tight and waterproof to 1 meter for 30 minutes.

Spot beam utilizes smooth parabolic reflector for tight beam with optimum peripheral illumination.

Integrated, spring loaded belt clip contained within body outline.

Corrosion proof.

**APPROVALS\*:**


Class I, II, Division 1, Groups A, B, C, D, E, F, G; Class III; CL I, ZN 0, IIC; Exia; T-Code: T4 (approved for use with Energizer E91, EA91, L91, Duracell MN1500 and Rayovac NO.815)



Permissible Handheld Flashlight. Approval No. 20-A160001-0

Tested for Intrinsic Safety in Methane-Air mixtures only.

(approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)



II 1G Ex ia op is IIC T3/T4 Ga; FTZU 15ATEX0221X, IECEx FTZU 16.0017X (approved for use with Energizer L91, Duracell MN1500, Rayovac NO.815 (T4); Energizer E91, Panasonic LR6XP & LR6XWA (T3))

Meets applicable European Community Directives.

**WARRANTY:**


Streamlight's Limited Lifetime Warranty

**OPTIONAL**


Helmet Clamps

**ACCESSORIES:**

DUALIE 3AA PERFORMANCE CURVE

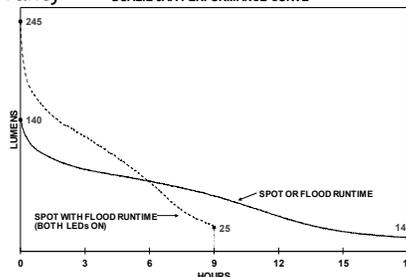

DUALIE 3AA LASER PERFORMANCE CURVE

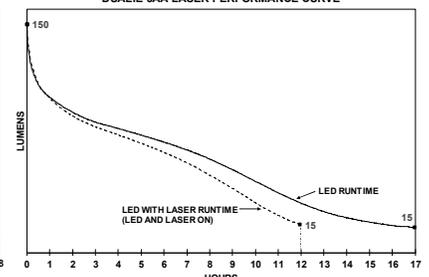

\* See product for specific ratings.

All performance claims to ANSI/PLATO FL1-2016 Standard

Issued: 07/06/2015

Revised: 06/11/2018 Rev: 7