

TELEPHONES LE LAS (FRANCE Head Office)

Tel: 0033 1 48766262


E-mail: lelas@lelas.fr

Fax: 0033 1 48768304

Website: www.lelas.fr

All screws are stainless-steel only

VoIP Explosion proof IP66
Hands free type,
Wall mounting, 1 call button
NHA214HBM

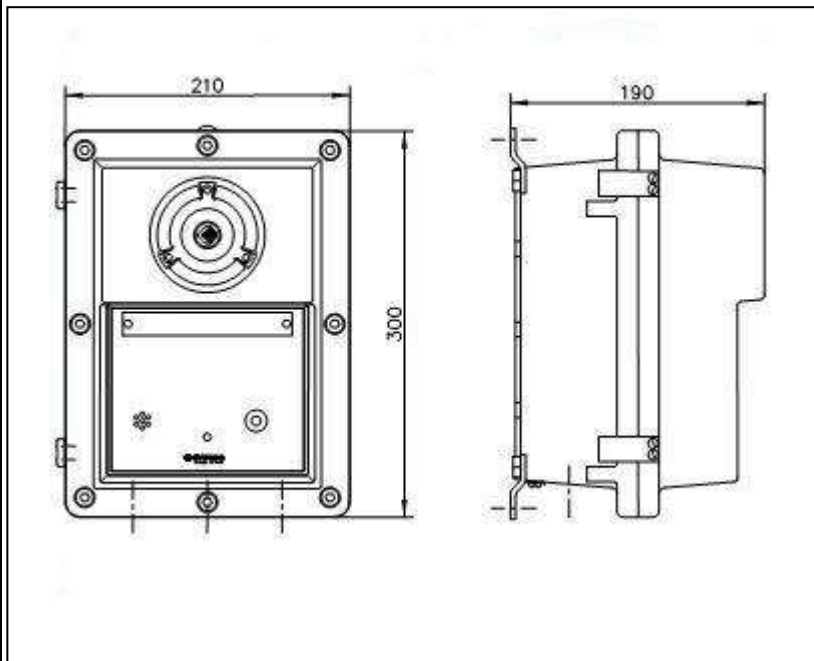

Electrical Characteristics:

Direct current supply : POE
Conversation mode : hands-free

Explosion proof marking :

Specific marking : II2G (gas) or Ex II2GD (dust)
Additional marking : Ex dIIBT6Gb / II2G
Ex tb IIIC / T°85C Db

Material/Color : cast aluminium / RAL2003
Microphone : vandal resistant/weatherproof type
Loudspeaker : resistant/Weatherproof type 15W
Mounting: wall mounting with 3 points
Dimension : 210 X 320 X 190 mm
Weight : 8,6 kg
IP-rating : IP66
Max. / min. amb. Temp : -40 °C / + 60 °C

Cable type : Cat5e network cable

VOIP Characteristics:

Voice and Media Middleware

Certified SIP Signalling Stack
Feature Rich Telephony Application
SIP, RTP, RTCP, STUN, NTP
Stand Alone P2P and Proxy Infrastructure Modes
SIP Failover Server Support
Analog Audio Subsystem
Consistent Voice Processing Subsystem

Telephony Features

Hotline, Intercom, Push-to-Call Modes

Consistent Voice Processing Subsystem

G.711a, G.711u, G.736-32, G.721-RFC3551, iLBC, G.722
AEC (Acoustic Echo Canceller)
DTMF Detect and Generate
Call Progress Tones

webUI Module

Complete Web Interface for Configuration
Login Authentication

