

TELEPHONES LE LAS

Tel: (33) 1 48.76.62.62

Fax: (33) 1 48.76.83.04

E-mail: lelas@lelas.fr

 Web-site: www.lelas.fr
**ANALOG WEATHERPROOF
TELEPHONE IP66**
Handset / Keypad 14 buttons
TLA 412 E1

This model is designed for installation at industrial sites inside and outdoors

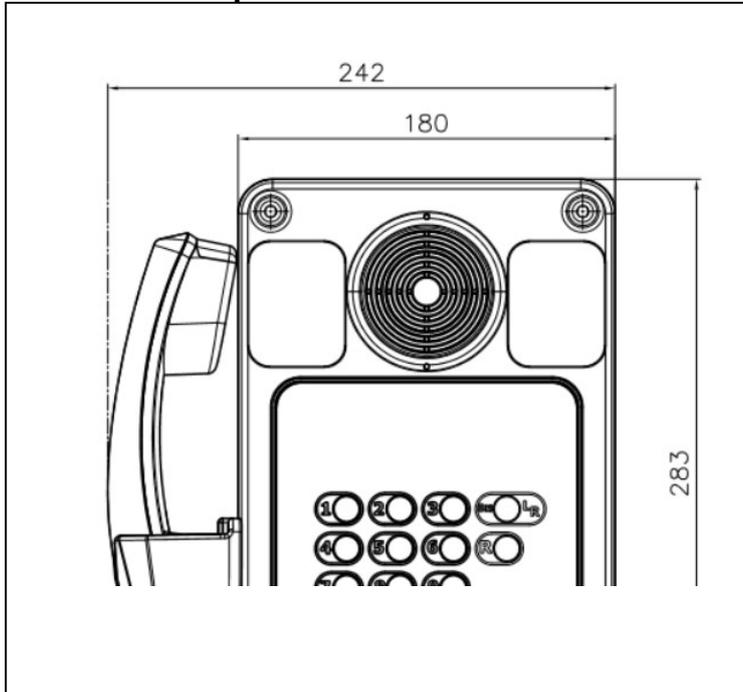
TLA 412 E1

Electrical characteristics:

- Line tension : 12 - 60 Vcc
- Consumption: 40mA
- Ring tension: 30–90 Vac / 20-64Hz
- Dialing : DTMF / décimale
- Flashing : ajustable
- Ringing signal sound power : >90 dB / 1 m.
- Flash integrated : as option
- Conversation type: with handset
- Handset type : magnetic

Options:

- Integrated flash lamp
- Monitoring at distance
- Other colors on demand
- Additional cable entry
- Other types of cable entries
- Button of direct call
- Holding screw on the upper box

Dimension plan


- Body material : glass fiber reinforced polycarbonate
- Color : upper box orange Ral2003 / back box black Ral9005
- Headset : black Ral9005 with stainless steel cord
- Loudspeaker : antivandal Buzzer Piézo
- Fixation : on wall on 2 or 4 screws
- Line connection : on withdrawable connector
- Type of cable : mono/multi wire cable with section maxi 1.5mm²
- Entry of cable : cable of Ø6 - Ø12mm
- Dimension : 242 X 283 X 105 mm
- Weight : 2 kg
- Protection (IP/IK) : IP66/IK08
- Ambient temperature of use: -40 °C / + 70°C

Instation and maintenance procedure:

- Opening and closing of the cover on seal with 4 captive stainless-steel screws.
- Fix the telephone on the wall on 2 or 4 screws Ø6 max. Not to forget to install sealing plugs
- Adapt the diameters of cables to the diameters of cable glands and tighten them correctly.
- Connection: passing the cable through the cable gland then connect to the telephone line on the connector with mono or multi wire with maximum section 1.5mm²

This equipment is supplied with 2 years manufacture and parts ex-factory warranty.

