

## XPP-5422G

### Intrinsically Safe Permissible Dual-Light™ Flashlight

**MARKET APPLICATIONS**

Hazardous work environments, industrial, automotive, law enforcement, fire & rescue

**DESCRIPTION**

This non-rechargeable Dual-Light™ flashlight is cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible. It uses a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility and safety. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Power comes from 3 AA premium batteries (not included).

**CASE MATERIAL**

Engineered Polymer - Green

**DIMENSIONS**

Length: 7.0 inches (178 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.0 x 1.5 inches (25 x 38 mm)

**WEIGHT**

Weight: 6.9 oz. (196 g) with batteries installed

**LENS**

Unbreakable polycarbonate with scratch resistant coating

**LIGHT SOURCE**

Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime

**LIGHT OUTPUT**

Flashlight: 120 lumens, Floodlight: 120 lumens, Dual-Light: 240 lumens

**ON/OFF**

Dual Body Switch - Momentary or Constant-on Flashlight, Constant-on Floodlight

**RUN-TIME**

Flashlight: 17.5 hours, Floodlight: 17.5 hours, Dual-Light: 4.5 hours

**BATTERY**

3 Alkaline AA batteries (not included)

**FEATURES**

- cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible
- Flashlight – Floodlight – Dual-light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-light (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Dustproof / Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip & removable lanyard
- Requires 3 AA batteries

**WARRANTY**

Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

**APPROVALS**



**Permissible Nightstick 5422 Flashlight/Floodlight**

**MSHA** APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY


WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 4) The Model Nightstick 5422 must not be opened in areas where permissibility is required.


 <b>Intertek</b>	ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	 0359	 INMETRO NCC 15.0286 X
CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓢ I M 1 Ex ia I Ma Ⓢ II 1 G Ex ia IIC T3 Ga		Ex ia I Ma Ex ia IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

**FL 1 STANDARD**

 <b>120 LUMENS</b>	 <b>17h 30min</b>	 <b>170m</b>
 <b>7250cd</b>	 <b>2m</b>	 <b>1m</b>

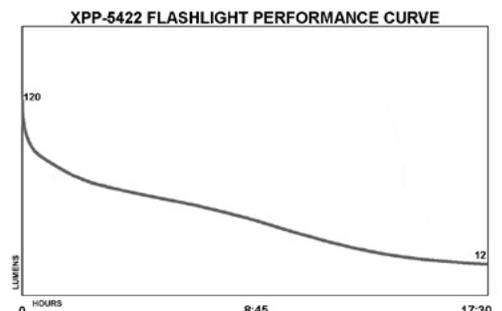

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

Bayco Products, Inc. • 640 South Sanden Blvd. • Wylie, TX 75098 • 1-800-233-2155 • 1-469-326-9400 • www.nightstick.com

PDS-XPP-5422G-17