

## XPR-5542GMX

### Intrinsically Safe Rechargeable Dual-Light™ Flashlight w/Magnet


<b>MARKET APPLICATIONS</b>	Hazardous work environments, industrial, automotive, fire & rescue
<b>DESCRIPTION</b>	The XPR-5542GMX Rechargeable Dual-Light™ Flashlight with Magnet is cULus, ATEX, and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. It uses a CREE® LED rated at 400 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 215 meters. A 225 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a strobe and the second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. Power comes from a rechargeable Lithium-ion battery.
<b>CASE MATERIAL</b>	Glass-filled nylon polymer
<b>DIMENSIONS</b>	Length: 9.5 in (27.68 mm) • Handle Diameter: 1.2 in (30 mm) • Head Diameter: 1.6 in (41 mm)
<b>WEIGHT</b>	Weight: 10.9 oz (309 g)
<b>LENS</b>	Polycarbonate with scratch resistant coating
<b>LIGHT SOURCE</b>	CREE® LED technology – 50,000+ hours LED
<b>LIGHT OUTPUT</b>	Flashlight: 400 lumens, (Medium)170 lumens, (Low) 80 lumens Floodlight: 225 lumens Dual-Light: 275 lumens
<b>RUN-TIME</b>	Flashlight: 10.5 hours, 19 hours, 41 hours Floodlight: 10.5 hours Dual-Light: 10 hours
<b>BATTERY</b>	Lithium-ion battery
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• cULus, ATEX, and IECEx listed Intrinsically Safe</li> <li>• Flashlight/Floodlight/Dual-Light™</li> <li>• Momentary or constant-on flashlight plus 3 brightness levels &amp; strobe</li> <li>• Sharp focused flashlight beam for distance illumination</li> <li>• Unfocused wide-beam floodlight for close-up illumination</li> <li>• Dual-Light (flashlight &amp; floodlight on at the same time) for maximum safety</li> <li>• Effective beam distance of 215 meters</li> <li>• Non-slip grip</li> <li>• Dual body switches</li> <li>• Integrated tail-cap magnet for hands-free usage</li> <li>• Dustproof / Waterproof</li> <li>• Impact and chemical resistant</li> <li>• Includes wall/vehicle mountable charger, AC/DC power supplies</li> </ul>

FL1 STANDARD	HIGH	MEDIUM	LOW
	400 LUMENS	170 LUMENS	80 LUMENS
	10h	19h	41h
	215m	152m	90m
	11571cd	5813cd	2045cd
	2m / 1m		

**WARRANTY APPROVALS**



XPR-5542 PERFORMANCE CURVE

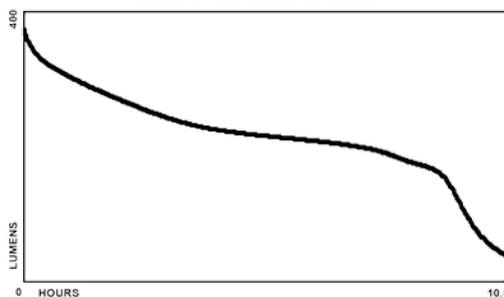

 E 467756 ID 4008947 INTRINSICALLY SAFE SECURITE INTRINSEQUE  0359	<b>Bayco Products, Inc. XPR-5542</b> Wylie, TX 75098
	Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS UL listed for use with Bayco Li-ion Battery Pack 5500-BATT CLASS I DIV 1 GRPS A-D T4 CLASS II & III DIV 1 GRPS E-G CLASS I ZONE 0 GRP IIC T4 CLASS II ZONE 20 IIIC T135°C © II 1 G Ex ia IIC T4 Ga

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

Bayco Products, Inc. • 640 South Sanden Blvd. • Wylie, TX 75098 • 1-800-233-2155 • 1-469-326-9400 • www.nightstick.com

PDS-XPR-5542-17